

2515 Bypass Rd. Flemingsburg, KY 41041 606-845-7439

Instructions for Installation and Care of Kubota RTV X900

Soft Rear Window

KU-RTVX900-RW01

Notice: Do not smoke inside the cab or expose the enclosure to direct flames. Cab is Flammable.

Be sure to read these instructions thoroughly before opening and installing the Kubota RTV X900 Soft Rear Window. The installation is best done when the temperature is 70 degrees F. or warmer. The temperature affects the adhesive Velcro, if conditions prevent installing in warmer weather it helps to store the adhesive Velcro at room temperature prior to installation.

- 1. Carefully open the carton and remove the enclosure on a large flat surface that is clean and free of dirt.
- 2. Check over the parts included in the carton with the parts list shown below:


Adhesive	e Velcro	Hook	Strips:	15 each	3"
"	"	"	"	2 each	18"
"	"	"	"	1 each	53"
Cab Enclosure				1 panels	

If any parts are damaged or missing please contact customer service at (606) 845-7439.

3. Begin by installing the Rear Window. Along the bottom of the rear window is a 53" long Velcro strip. This will attach to the shelf under the expanded metal cage and along the top of the seat back. Take the 53" adhesive Velcro strip and adhere it up under the shelf with the Velcro facing down. Then attach the bottom of the rear window making sure to center it and keep it straight. The photo below shows how it should fit.



4. Now pull the rear window up and attach it to the top bar across the back of the roll cage. The top and sides of the rear window has double-sided Velcro sewn along the edges. At each of these strips you will place a 3" adhesive Velcro strip on the inside of the bar to hold the double-sided Velcro in place. The diagram below shows how to place the Velcro.

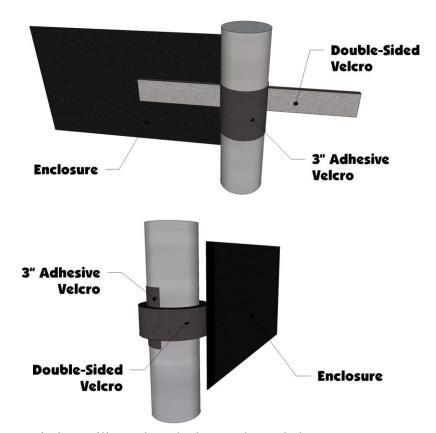

5. The top of the rear window will attach to the bar as shown below:



6. Attach the sides of the rear window in the same fashion as shown in the photo below.



7. The Velcro strips down the sides of the Rear Window are not used unless you have the Falcon Ridge Soft Door Kit. If you do not have the doors just ignore this strip. They will be there if you ever decide to add the doors later.

Cleaning and Storage Recommendations:

- 1. Before removing the enclosure for storage, make sure it is clean and dry, to prevent soiling the textile and scratching the clear vinyl windows. Clean with a soft rag or sponge using a mild liquid detergent soap and warm water solution. Let the enclosure dry thoroughly before attempting to roll for storage.
- 2. It is important that the enclosure be rolled up for storage rather than folding. Folding will cause undesirable creasing of both the enclosure textile and the clear vinyl windows. Carefully roll up the enclosure similar to the way it was when it was packed at the factory. Put the rolled enclosure back into the carton for storage at a normal room temperature. It is best not to expose the enclosure to either extreme hot or cold temperatures when storing.
- 3. A special cleaner/conditioner is available from Falcon Ridge that will greatly increase the service life of the cab enclosure. If needed, additional hook and loop sets are available, as well as other spare parts and hardware. Contact Falcon Ridge for information.

Thank you for your purchase!

Return Policy

If for any reason you choose to return this product it must be returned within 30 days from date item is received. You MUST package the product exactly as it was originally packaged from the factory to get a full refund for the product!

The vinyl windows should never be folded when packaging in the box or for storage purposes. Lay all the windows on top of each other with the canvas folded in between and the paper (if available) on both sides of the windows.

All returned products will be inspected upon arrival at the production facility and must be in unused, factory new condition to receive refund - a 25% restocking fee will apply.

If ordered from Falcon Ridge please call at 606-845-7439 to gain a return authorization number, use our preferred shipping carrier (UPS) to return the item (unless the item is defective, you are responsible for paying the shipping to return the item.) Any returns submitted to Falcon Ridge without a return authorization number will be charged a 20% restocking fee. If ordered from one of Falcon Ridge's many distributors', you must first call them and see what their return policy is. Once your item reaches our production facility, our customer satisfaction team will inspect your item to ensure unused, factory new condition. NOTE: All windshields must be returned with the original protective film intact and not removed. Do NOT REMOVE if you have any intentions of returning the item. Refund/ replacement of a windshield will only be processed on items with original protective film or if the windshield is defective.

Items must be properly packaged in the original shipping carton to protect them during transit and ensure your returned item arrives back factory fresh, and in new resalable condition (any returned items that have been used, altered or damaged in any way will not be subject for a refund.) All contents including instruction manuals, accessories, hardware, Velcro, etc. must be included in your return shipment. Only items in OEM factory new condition will be approved. Once returned items are received, credit will be issued to the original credit card/ payment method used for the purchase. Outbound shipping and return shipping cost will not be refunded. Please allow 4 to 6 weeks for your refund to be processed.

Warranty

To The Owner of this Product:

Thank you for purchasing one of Falcon Ridge Cab Enclosures, Tops &/or Windshields! Below are the terms under which your product is covered under our manufacturer's warranty.

30 Day Warranty which includes and is not limited to replacing the enclosure, tops and/or windshield due to defect of the product. Please refer to the return policy in this case for more information.

1 Year Warranty includes any defect in material or workmanship within this time frame we will gladly correct the problem or replace the enclosure, tops &/or windshield. Upon submitting for the correction or replacement we will need to receive pictures of the defect in material or workmanship along with the receipt from the date of purchase.